

Taxi Top LED Display - XT Series

XT series is specially designed for Taxi Top mobile advertising, it is a new transmitter in mobile media field, make your ads would display through the crowds, spreading everyone, everywhere.


Advantage

- Double Sided design attract more audiences
- Light Weight : only 15kg per unit
- Slim frame reduce air-resistance: depth is only 58mm
- Up to 5000 nits High brightness with low power consumption
- Shock test passed
- Multi-Control Method: USB/RJ45/4G are optional
- GPS fixed-point playback function we can offer
- Time delay Power off/on to protect other equipments and itself




Smart Power System with Delay Switch Function

Smart design with high level power supply, beyond voltage, current load, short circuit will be protected. Also it is with delay switch function: when driver switch on the screen, the power supplier will be power on 10 seconds later, and screen system will be start to be working 60 seconds later. When driver switch off the screen, the screen will be power off 10-200 seconds later, this delay switch function is for protecting the whole led screens and other electronic equipments in your car.

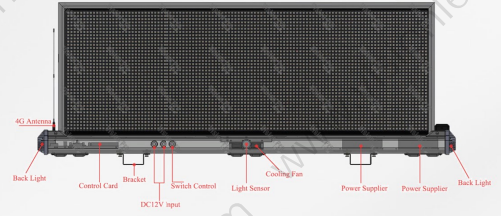

Ultra Light & Slim; Low Power Consumption with High Brightness

Aluminum case with oxidation treatment, coating film for anti-ultraviolet, outdoor painting for anti-rusting and anti-aging. Weight will be 15 kg for one unit, and the depth of the case is only 58mm. Smart module design make the power consumption only to be less than 390W per set; but it is with high brightness up to 4000 nits.

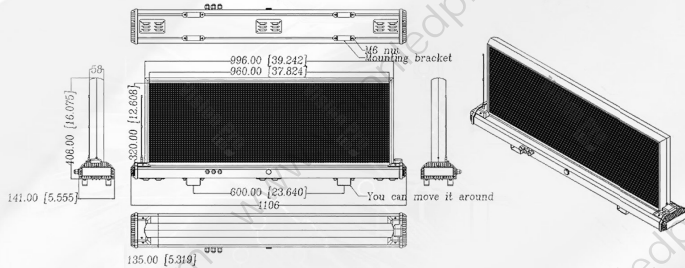

Multiple Control Method

1. USB Disk: you have to use PC or Laptop to programme the advertising content by software, and put the program file into USB disk, then connect USB disk with the led screen, our led screen will read the program file automatically.

2. Wifi: this Wifi is not for internet, our led screen is integrated with WIFI Hotspot, you can use your laptop, Pad or Phone to connect with our led screen by WIFI hotspot, then using our software to programme video content.

3. Cloud Management: this control method is only for your company prepare to equip with many sets XT series in one city or different city, group data management makes controlling easily.



Standard Accessories



Control Card



Switch Control Cable



DC12V Power Cable



Bracket

Installation



Technical Parameter

Items	XT-2	XT-3	XT-5
Pixel Pitch (mm)	P2.5	P3.33	P5
LED	SMD1921	SMD1921	SMD1921
Pixel Density (dot/m ²)	160000	90180	40000
Module size (mm)	320X320	320X320	320X320
Module Resolution	128X128	96X96	64X64
Frame size (mm)	1102 x 405 x 135		
Display size (mm)	960X320		
Display Resolution	384X128	288X96	196X64
Min Viewing Distance	2m	3m	5m
Cabinet Materials	aluminum case with oxidation treatment, coating film for anti-ultraviolet		
Scanning	1/16	1/12	1/8
Grey Rating	14 bits		
Application environment	Outdoor		
Viewing Angle	H: 120° V: 120°		
Protection Level	IP65		
Brightness	5000 nits		
Frame Frequency	50/60HZ		
Refresh Rate	5100 HZ		
Input Voltage	DV 12V		
Failure Rate	<1/50,000		
Power Consumption	MAX: 390Watt/Set Average: 130Watt/Set	MAX: 380Watt/Set Average: 126Watt/Set	MAX: 350Watt/Set Average: 116Watt/Set
Life Time (hours)	100,000		